







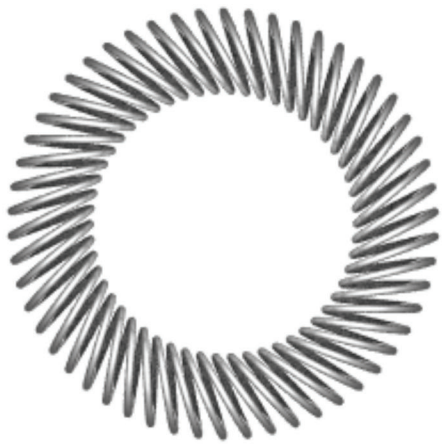
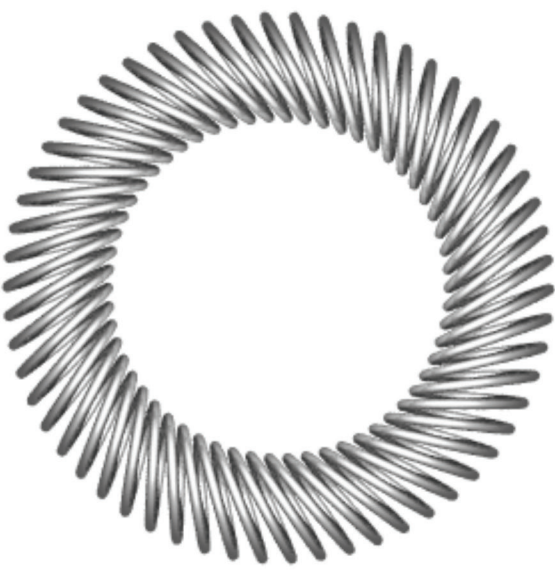
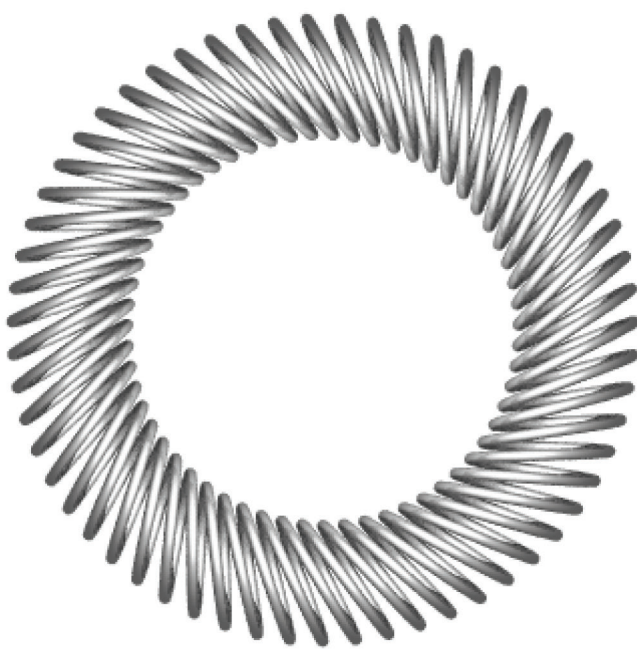


## Typical Cross Sections Of Bal Spring® Canted Coil Springs

Note: Ranges shown are suggested inside diameters in inches (mm).

102	101	100	104	105	106	107	108	109	1010	1011
 <p>0.030-0.200 (0.76-5.08)</p>	 <p>0.050-0.500 (1.27-12.70)</p>	 <p>0.100-1.500 (2.54-38.10)</p>	 <p>0.175-4.000 (4.45-101.60)</p>	 <p>0.230-9.000 (5.84-228.60 mm)</p>	 <p>0.325-15.000 (8.25-381.00)</p>	 <p>0.430-30.000 (10.92-762.00)</p>	 <p>0.650-60.000 (16.51-1524.00)</p>	 <p>0.900-110.000 (22.86-2794.00)</p>	 <p>1.500-180.000 (38.10-4572.00)</p>	 <p>2.000-300.000 (50.80-7620.00)</p>