

LQR® Lock and Quick-Release System for Mechanical and Electrical Applications


The LQR® lock and quick-release system consists of a piston with dual grooves and a single Bal Spring® canted coil spring retained in a housing with a single groove. When the piston is inserted to the first groove, it is held in the “locked” position. When the piston is advanced to the next groove, the spring is re-oriented and the breakaway force is dramatically reduced.

Applications:


Quick-release electrical connectors, solder-free electrical connections, underwater connectors, satellite/orbital connectors, mechanical lock connectors, quick fasteners, fluidic connectors, and tamper-proof applications.

Operating parameters:

The LQR system can be used in an unlimited range of sizes, temperatures (from cryogenic up to 1000°F/537°C or higher), almost any media, and a nearly unlimited number of cycles*. The piston configuration can be adjusted to facilitate a wide variety of connection and removal forces, while the locking force can support extreme loads.

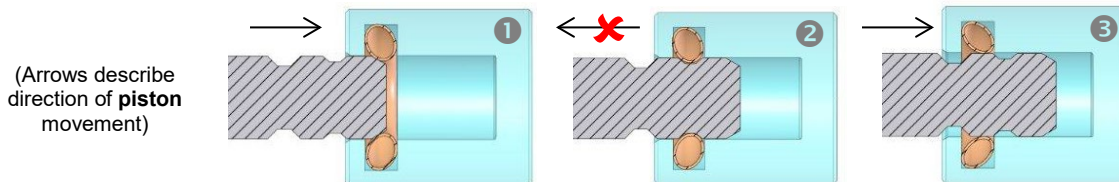

1. Low force insertion; 2. Spring snaps into locking groove (up to 40X removal force); 3. Piston pushed past first groove; 4. Spring snaps into second groove; 5. Second groove re-oriens spring for easy removal; 6. Low force removal.

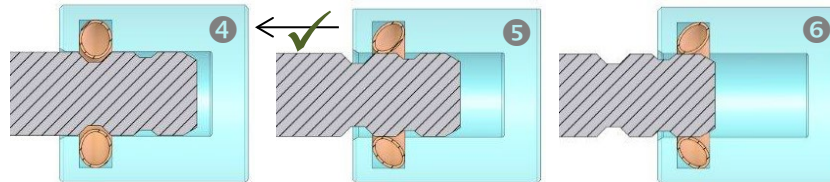

Features

- A locking system that offers the added benefit of reliable, built-in electrical conductivity and a means of quick, low-force release with a minimum number of components
- Integrated Bal Spring® canted coil spring provides adjustable connection and removal forces - from a few grams to hundreds of pounds
- Adjustable locking forces - from 5 to 40 times the insertion force
- Repeatable insertion and removal forces**
- Wide variety of removal techniques - from simple push-pull, to positive and tamper-proof indicators
- Housing or piston mounted versions available
- Temperature and media compatibility limited only by housing, piston and spring materials

Our products are custom-engineered to improve the performance and reliability of your designs. For more information about this and other sealing, connecting, conducting and EMIRFI shielding solutions, please contact us, or visit us at www.balseal.com.

*The LQR system is custom engineered to specific application requirements. Its actual performance capabilities are subject to testing and verification in customer applications. **If locking mechanism is overloaded, the spring will be damaged and will require replacement.

It is essential that the customer run evaluation testing under actual service conditions with a sufficient safety factor to determine if the proposed, supplied or purchased Bal Seal Engineering, Inc. products are suitable for the intended purpose and to confirm expected results. Bal Seal Engineering, Inc. shall not be liable for any loss or damage of any kind or nature that may result from the use of, reference to, or reliance on the information contained herein, including but not limited to consequential, special (including loss of profits) direct, indirect, incidental or similar damages, even if Bal Seal Engineering, Inc. has been advised of the possibility of such damages. © 2012, Bal Seal Engineering, Inc. Products contained herein may be covered by all or in part by one or more of the following U.S. Patents: 8,054,459. Products contained herein may be covered all or in part by various pending U.S. Patents.

Bal Seal Engineering, Inc.: 19650 Pauling • Foothill Ranch, CA 92610-2610 • Tel: (949) 460-2100 • Fax: (949) 460-2300
Bal Seal Engineering Europe B.V.: Jollemanhof 16, 5th floor • 1019 GW Amsterdam • The Netherlands • Telephone: 31 20 638 65 23 • Fax: 31 20 625 60 18
Bal Seal Asia Limited: Suite 901, Chinachem Century Tower 178 Gloucester Road, Wanchai, Hong Kong • Telephone: +(852) 28681860 • Fax: +(852) 22956753